




LEEMIN
黎明液压

JB1885 ~ 1887-77扣压式胶管总成

JB1885-1887-77 CUTTING FERRULE HIGH PRESSURE HOSE ASSEMBIES

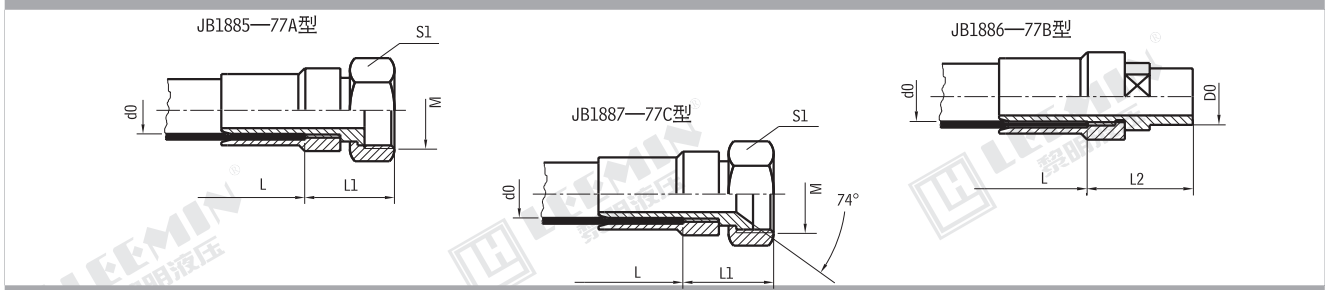

型号说明:

16 II — L JB1885—77
 胶管内径 标准号
 胶管丝层数 胶管长度

尺寸汇总表

单位 Unit:mm

管内径 d0	通径 Dia.	工作压力 Pressure(MPa)				M	S1	L1	L2	D0
		I层	II层	III层	IV层					
6	6	20	25	40	42	M14 × 1.5	17	23.5	33	6
8	8	16	25	32	35	M16 × 1.5	19	25	35	8
10	10	16	25	25	30	M18 × 1.5	22	26.5	38	10/12
13	12	12.5	20	25	27	M22 × 1.5	27	30.5	41	14
16	15	10	16	20	23	M27 × 1.5	32	33	41	16
19	20	10	16	20	20	M30 × 1.5	36	36	46	18
22	20	10	12.5	16	18	M36 × 2	41	38	51	22
25	25	8	10	12.5	17	M39 × 2	46	40	54	28
32	32	6.3	10	10	16	M45 × 2	55	44	60	34
38	40	4	8	10	15	M52 × 2	60	46	63	42
45	40		8	8	15	M60 × 2	70	53		
51	50		6.3	8	15	M64 × 2	75	58		

注: (1)A、B、C型扣压式胶管接头主要尺寸均可从表中查出;
 (2)B型规格d0=38, C型规格d0=32;
 (3)爆破压力不低于工作压力的4倍;

(4)工作介质: 液压油、燃料油、润滑油、空气、水及乳化液等;
 (5)工作温度: -30 ~ +100°C